


IOP-PANFO-2M1403335

2.4GHz 14dBi Dual Polarization MIMO Patch Antenna




Electrical Specification	
Frequency	2400 - 2500MHz
Antenna Gain	14dBi +/-0.5dBi
VSWR	2.0 : 1 (Max.)
Polarizations	90° Dual Polarization / Vert. & Hor.
Isolation	20 dB Typical
HPBW/H-Plane -3dB V-Plane	33°
HPBW/V-Plane -3dB H-Plane	35°
Front Back Ratio	25dB
Power handing	5W
Input Impedance	50 Ohm
Connectors	SMA / N Plug x 2
Cable Type/Length/Cable Loss	RG233, 100cm
Anti-lightning induction protection	DC Grounding
Mechanical Specification & Environment Characteristics	
Dimension	266 x 266 x 40 mm
Weight	1000g
Radome Color	White
Radome Material	PC, UV resistant, UL746C
Temperature	-40oC to 80 oC
Humidity	95% @ 55 oC
Survival Wind Speed / Scale	250Km/hr & 17Beaufort scale
Waterproof	IP67
Shell identification method	The orange text is marked on the top and bottom of the shell
Universal Stainless Mounting Kit* P/N:IOP-UHMK-VESA75-1 L x W x H : 125 x 125 x 77mm Weight : 0.9Kg	<ul style="list-style-type: none"> ■ Wall Mount / Car Mount ■ Pole Mount (1" ~ 2.5") ■ Lamp Post (Belt Type) ■ Electric Pole (Belt Type)
* Support International VESA Standard Installation Size : 75 X 75 mm * Support General ODU Installation Size : 60 X 60 mm ~ 75 X 75mm * Support Triangle Fixing Point Fixed Way * Support Screw-tightening Method * Support + -40° Antenna Angle Adjustment Function	
	


■ Radiation Pattern

H-Polar

■ H-Plane +0° Horizontal +0° Polarizations

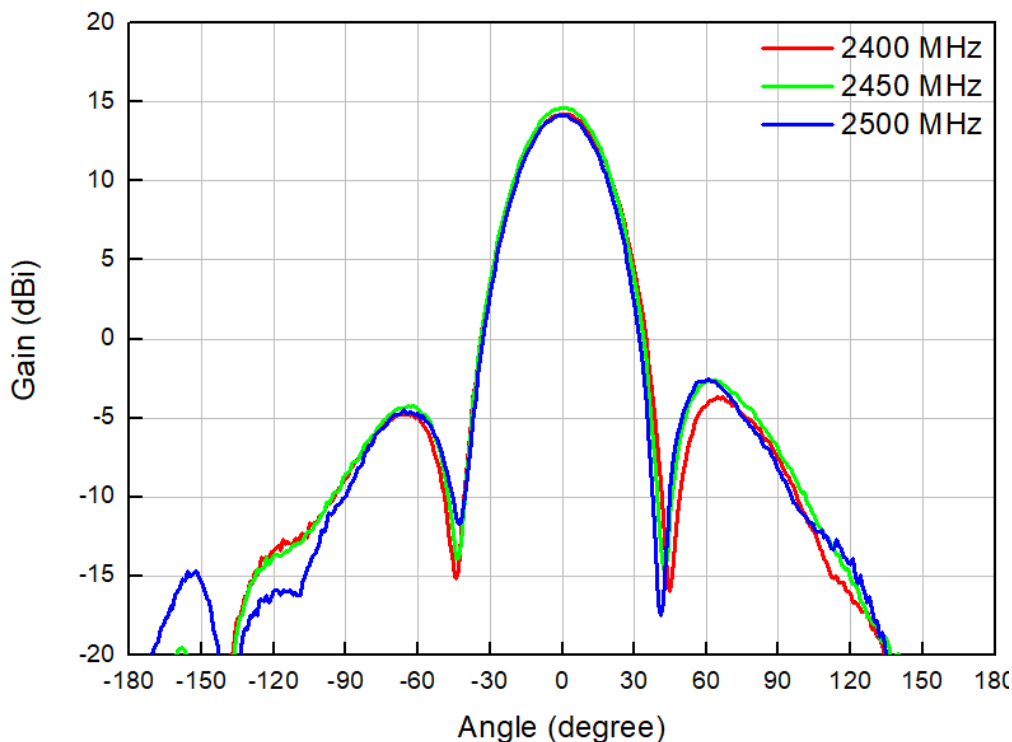


■ H-Plane 90° Horizontal 90° Polarizations

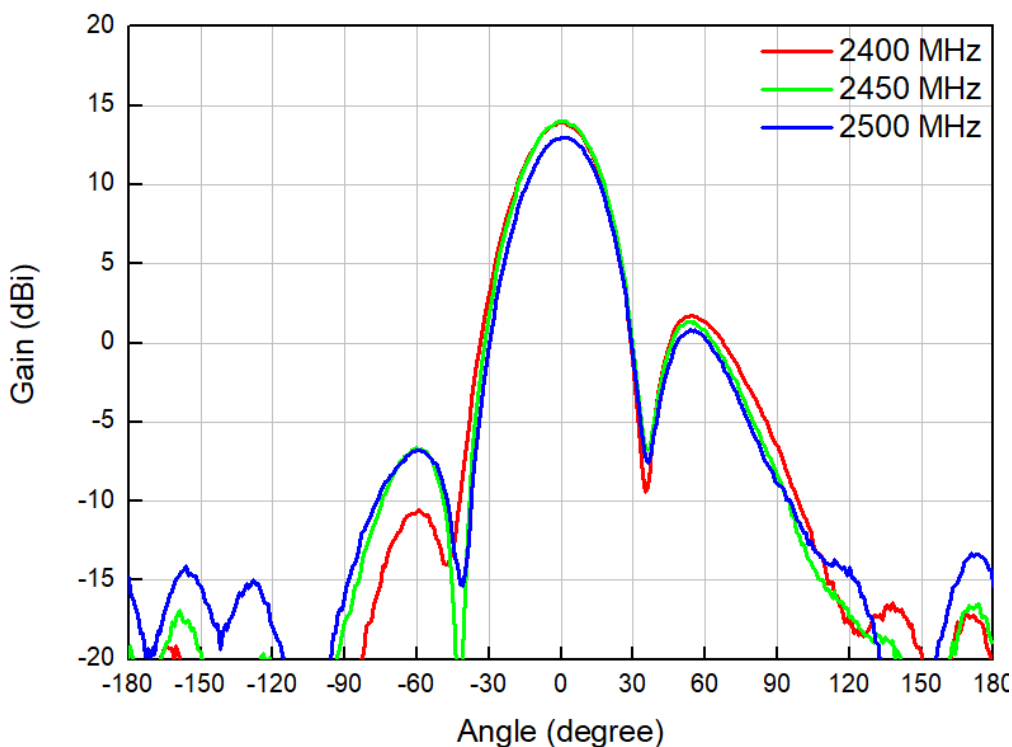

V-Polar

■ V-Plane +0° Vertical +0°Polarization

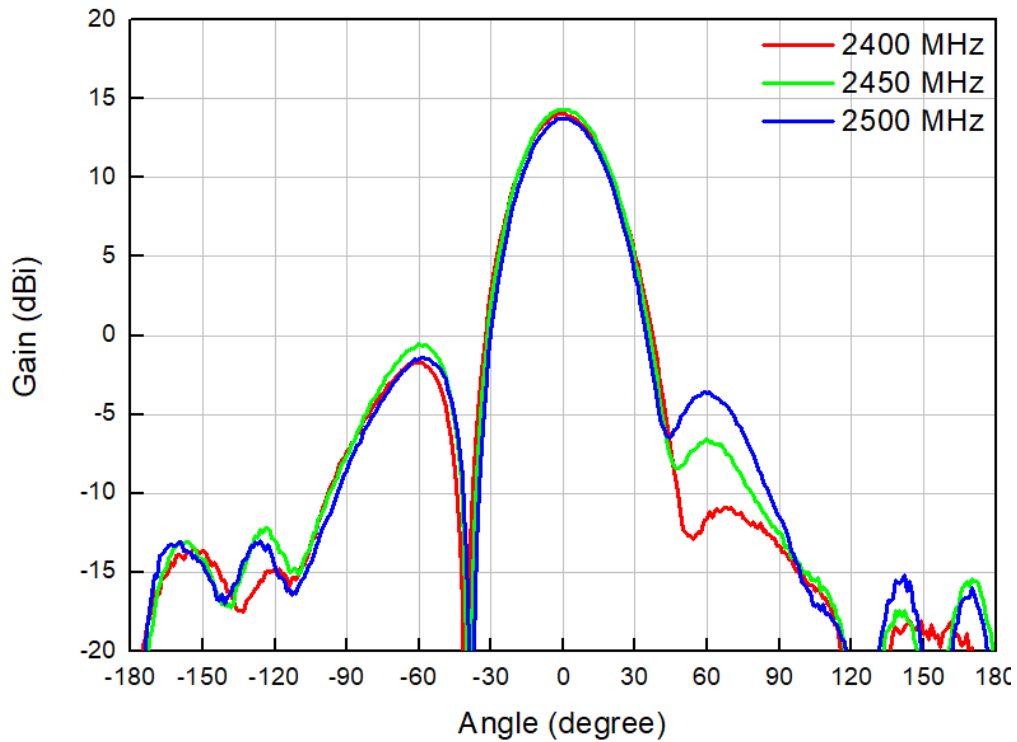

■ V-Plane 90° Vertical 90°Polarization

